



## > PROGRESS 5000 LH


## ✓ TECHNICAL SPECIFICATIONS


MAIN FEATURES	
Construction	Frame: Galvanised Steel; Double Coated Painting
	Housing: Stainless Steel
	Panels: Aluminium; Double Coated Painting
Admission	Suction: High Performance Compact Gear Pump RTF Pressure: Submersible Pump
Meter	Positive Displacement Meter PTF, with Pulse Generator and Integrated Electronic Calibration
Filters	Reusable Stainless Steel, 100 µm mesh
Motor	Eexd, Single/ Three-Phase, 50/60 Hz w/ Internal Thermal Protection
Calculator	eMC <sup>2</sup> Electronic Modular Calculator, 2nd Generation
Hose	Ø16, 19, 21, 25 mm (EN1360/EN13483) (VR2 Approved)
Nozzle	Automatic ZVA2 or Others
Fuel Types	Petrol   Diesel   Biodiesel   Ethanol (E85) (1)   LPG (1)   AdBlue (1)
Flow Rates	10, 40, 80, 130 L/min   Up to 5 Products/10 Hoses
Certificates	ATEX; MID
Note: (1) Only available with pressure version.	

## OPTIONS - Speed Selector (40/80 L/min) - Breakaway Couplings - Vapour Recovery w/Monitoring - Voice Module - Automatic Temperature Compensation - Custom Nozzles and Sleeves - Electro-mechanical Totalizers - Single/ Three-Phase Motor - Flexible Riser Connection - Unit Price Display - TAGs - Stainless Steel AISI304 Image Panel - OPT \* - Volume Preset - Stainless Steel AISI316 Housing - Amount Preset - Multimedia - Foundation Frame - Circuit Breaker - AdBlue Hydraulic Housing Heating (ATEX) - Custom Corporate Image - Main Safety Switch (LPG) - AdBlue Hydraulic Housing Heating - Lifting Solution (for easier handling) - Electronics Head Heating - Low Temperature Kit Note: \* Integration with wide range of terminals. - Satellite Ready (1 per side) - Vapour Recovery Stage II


COMMUNICATION PROTOCOLS/INTERFACES		
- Petrotec	- IFSF IP	- HDX 2WI (Gilbarco)
- EPS5	- IFSF Lon v1.xx (Converter)	- DART
- Pulse Interface	- IFSF Lon v2.xx	- Dunclare
- ER3	- HDX 485 (Gilbarco)	- Pumalan


## ✓ AVAILABLE CONFIGURATIONS

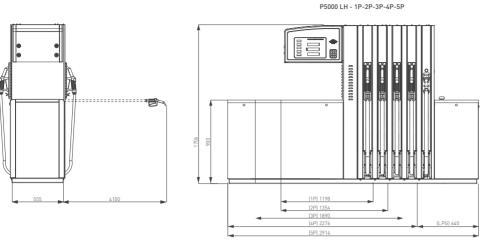





P5000 LH - 1P-AdBlue with heating








540





Note: All dimensions are in mm.

© 2018 Petrotec Group | All rights reserved. Petrotec, the Petrotec logo, Progress and combinations thereof are registered trademarks of Petrotec Group. Other names are informational and may be trademarks of their respective owners. Petrotec is continuously improving its products. Changes on the specifications may occur without prior notice. The imagery used may be indicative of style only. The available brochures are a guide and do not constitute an offer or contract.









